


## Product Specification

# FBRW125

EN 12254 Certified  
 Luminous transmittance: 50% Green

EN 12254 Rating	Wavelength (nm)	ODs
D AB4 + IR AB6 + M AB6Y 1000 –1150	1000–1150	5+
D AB4 + IR AB7 + M AB7Y 1060 –1100	1060–1100	7+
DI AB2 10600	10600	5+

## Spectrophotometer Data

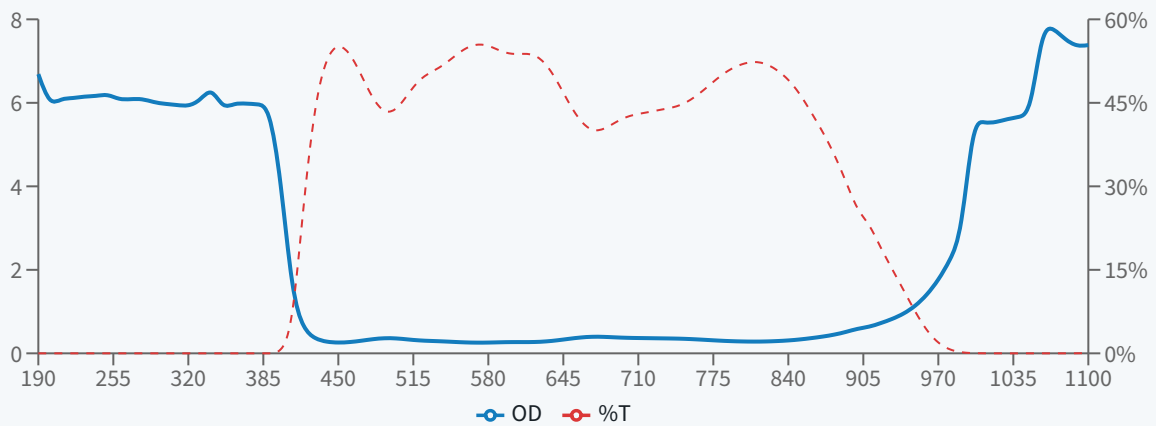

Available stock at 24" x 36" x .125" and special order up to 36" x 48" x .125"

Attenuates from 1000 nm to 1150 nm for fiber laser cutting, disc lasers (Yb:YAG), marking and welding systems including 1030nm, 1050nm, 1060nm, 1064nm (Nd:YAG), 1070nm, 1080 nm, 1090nm, 1100nm, 1130nm, and 1150nm. Replaces YGW125

