



4975 Technical Drive, Milford, MI 48381 USA
+1 (800) 521-9746 | +1 (734) 769-5565
noirlaser.com

Product Specification

IRW140

EN207 Pending
Luminous transmittance: 25% Green


CE Rating

Wavelength (nm)	L-Ratings
Pending	

Optical Density

Wavelength (nm)	ODs
190-400	5+
400-480	2+
750-1900	2+
800-1800	3+
830-1700	5+
1064	6+
10600	5+

Spectrophotometer Data

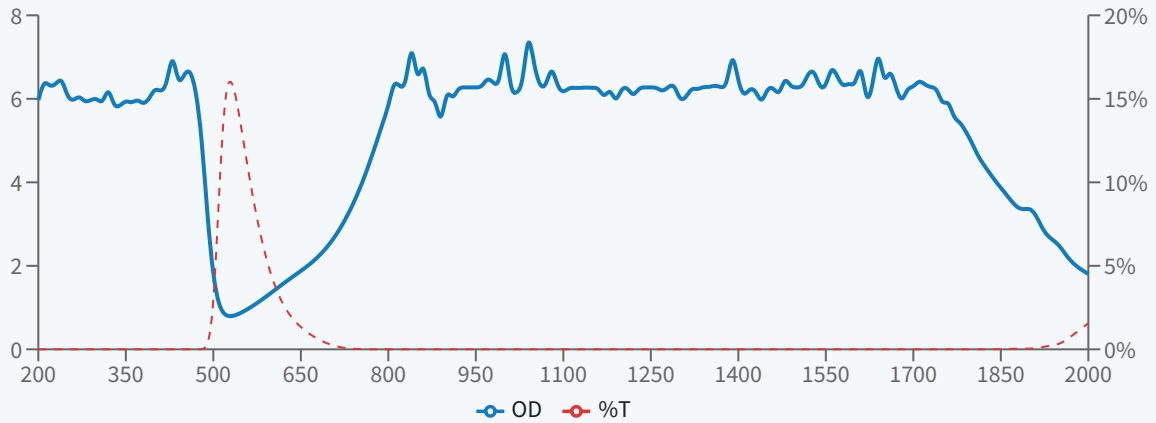

Available stock at 24" x 36" x .145" and special order up to 36" x 48" x .145"

Full IR protection for alexandrite, broad range of diodes, Nd:YAG, telecom and fiber optics laser wavelengths, gallium arsenide GaAs, Ti:Sapphire, solid state YAG doped mid IR lasers such as Tm:YAG, ErYt:YAG, welding, CO2 protection, UV curing, blue light and excimer protection.

