

IShield and IShieldX

EN207 Certified
Luminous transmittance: 0%
Stainless Steel



CE Rating

Wavelength (nm)	L-Ratings
180-315	D LB9 + R LB3
>315-1400	D LB6 + IRM LB7
>1400-10600	DI LB4

Optical Density

Wavelength (nm)	ODs
190-10600	7+

Spectrophotometer Data

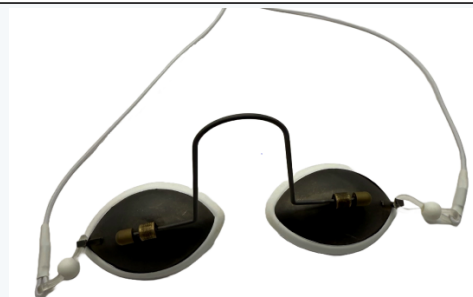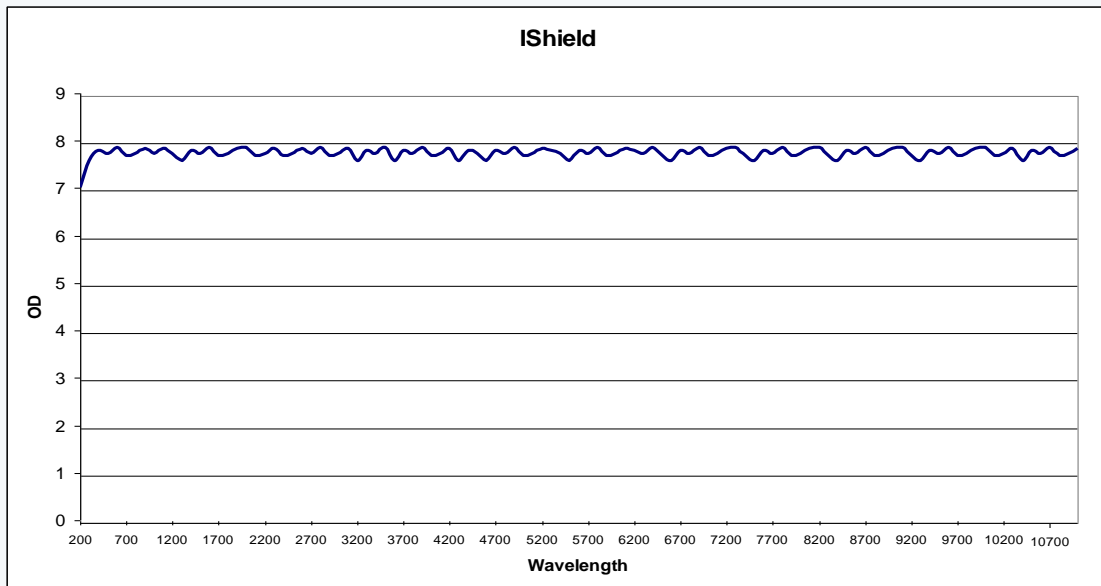

IShield: 116mmx29mmx40mm, 20.4g

As packaged in protective case with 2 pair silicone comfort rings, 4 head straps: 164.5g